


MANUAL CYLINDER VALVES ALFA NEW




description

- Manual cylinder valve with internal venting system (no gas tight housing required)
- Max working pressure: 260 bar
- Working temperature: -40°C +85°C
- Safeties: available without safeties or with a combination of thermal safety / excess flow / burst disk
- Available in different thread sizes – additional safeties available for cylinders and pipes

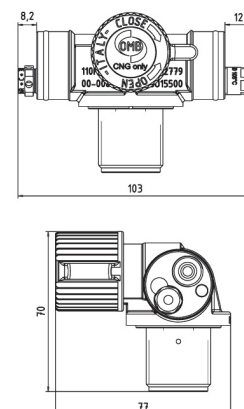

product

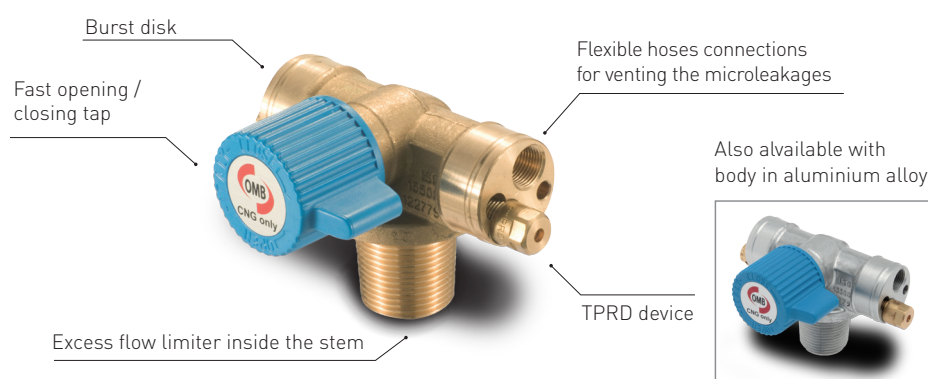

Standard TPRD with fusible plug
Glass bulb available upon request

certifications

ECE R110 - ISO 15500 - CC0E - OGRA - SISEI - CERTIFIED - COVENIN 3227

Cylinder connections	Inlet/outlet pipe connections	Flexible hoses connections	Without safeties	Excess flow + Thermal safety	Thermal safety + Burst disk	Excess flow + Thermal safety + Burst disk	Cylinder valve with Thermal safety
W28.8	M12X1	SMOOTH Ø30 mm	ALFANEW000	ALFANEW100	ALFANEW200	ALFANEW300	ALFANEW400
1" 1/8 UNF	M12X1	SMOOTH Ø30 mm	ALFANEW010	ALFANEW110	ALFANEW210	ALFANEW310	ALFANEW410
1" BS 341	M12X1	SMOOTH Ø30 mm	ALFANEW020	ALFANEW120	ALFANEW220	ALFANEW320	ALFANEW420
3/4" NGT	M12X1	SMOOTH Ø30 mm	ALFANEW030	ALFANEW130	ALFANEW230	ALFANEW330	ALFANEW430